



RR1-0K4

RR1-0K4 PRINTING SPOT



When printing requirements demand letter, legal or A4 sized documents to be printed with a high quality laser, our strong RR1-0K4 Printing Spot is the cost-efficiency solution in the market.

Tasks such as outstanding balance, balance inquiries, invoice duplicates, document copies, online reports just to name a few, are some of the applications in which our Kiosk RR1-0K4 can help you serve your customer more effectively. Pick between any of our 3 touch panel options: 18.5" (16:5); 15" (4:3) or 14.1" (16:9) to fit right in almost all of the needs of resolution of your apps.

Make the most of the laser printer 600x2400dpi with capability of 250 pages (or up to 750 pages with the optional extra tray) and its 27 pages per minute printing rate. The RR1-0K4 Kiosk is the self-service printing station all your clients are asking for!

Market Segments


- Human Resources Department
- Public Services
- Financial Services
- Universities

*Software not included



RR1-0K4

RR1-0K4 PRINTING SPOT

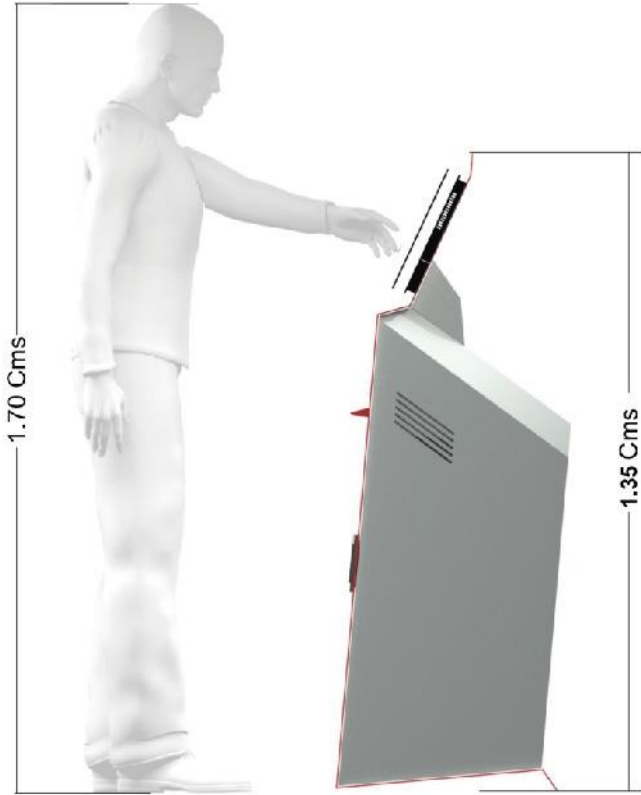

	D36	D66
Motherboard		
Processor	Intel Bay Trail CPU Celeron J1900 2.4GHz	Intel Haswell CPU LGA-1150
Chipset	CPU Integrated	Intel Lynx Point PCH H81 (default)
System Memory	1x DDR3L 1066/1333MHz SDRAM up to 8GB	1x DDR3 1333/1600MHz SDRAM up to 8GB
Graphic Engine	Intel Gen7@>300MHz	Intel HD Graphic DX11.1
LCD / TOUCH PANEL		
LCD Size		15" TFT LCD
Brightness		250 nits
Resolution		1024 x 768
Touch Screen		True-Flat Resistive or PCAP Touch
Tilt Adjustment		0° ~ 90°
STORAGE DEVICE		
Hard Drive		1x 2.5" SATA HDD
Flash Memory		1x SATA SSD card (Option)
EXPANSION		
MiniPCI-E Socket		1
EXTERNAL I/O		
USB		2x USB3.0/2.0, 4x USB2.0
Serial Port		3x RJ45 (COM1/2 5V, COM3 12V)
LAN		1x RJ45
Cash Drawer		1x RJ11
Parallel Port		1 (Option)
VGA		1x DB15
Audio Line-out		1 (Option)
DC Jack		1
INDICATOR		
LED Indicator		1
POWER		
Power Adapter	65W / 19V	120W / 19V
COMMUNICATION		
Wireless LAN		802.11 b/g/n WLAN card & antenna (Option)
PERIPHERAL (OPTION)		
MSR		3-Track MSR (USB)
i-Button		iButton (USB) (either iButton or Fingerprint)
Fingerprint		Digital Persona Module (USB)
2nd Display		8.4" without touch
Customer Display		LCM display 2 x 20 characters (USB)
CERTIFICATE		
EMC & Safety		FCC Class A, CE Mark, LVD
DIMENSION (WxDxH)		
		363 x 229 x 309 mm (14.3" x 9.0" x 12.2")
WEIGHT		
		6.8 kg (15 lbs)
OS Supported		
		Windows 7, POSReady 7, Windows Embedded 8.1 Industry, Windows 10 IOT Enterprise, Linux Kernel 3.8 or above



RF194SPPC Panel PC

MOTHERBOARD	C58
CPU Supports	Intel CedarView D2550 processor 1.86 GHz 1M Cache
Chipset	NM10
System Memory	SO-DIMM DDR3 x 2, total up to 4G 1066MHz
Cooling	Fanless
LCD Panel	
LCD Size	18.5" LED
Brightness	250 Nits
Resolution	1366 x 768
Touch Screen	True Flat Resistive touch
STORAGE DEVICE	
HDD	1 x WD 2.5" 320GB SATA HDD
EXPANSION	
Mini-PCIE Socket	1
EXTERNAL I/O	
USB 2.0	4
Serial / COM	RJ45 x 4 (COM2 5V/0.5A ; COM3/4 5V/0.5A or 12V/0.5A selected by BIOS & jumper setting, default BIOS setting 0V)
LAN (10/100/1000) Mbps	1
DC Jack	1
2nd VGA	1x (w/ +12V power, by BIOS setting)
Cash Drawer Port	1x RJ-11 (24V,default setting 24V)
Line out	1
MIC IN	1
Parallel	1
Power Switch	1
POWER	
Power Adapter	65W/19V-4pin Lock
INDICATOR	
Power LED	1
AUDIO	
Internal Speaker	2x3W
CONTROL / INDICATOR	
Power Button	1
ENVIRONMENT	
EMC & Safety	FCC, Class A, CE, LVD
Operating Temperature	0°C ~ 35°C (32°F ~ 95°F)
Storage Temperature	~ 60°C (-4°F ~ 140°F)
Operating Humidity	20% ~ 85% RH non condensing
Storage Humidity	20% ~ 85% RH non condensing
Dimension (W X D X H)	463x60x284
Weight	5.46 kg
OS Supported	Window 7 (32/64 bit), Window 8.1 (32/64bit), Linux
ACCESSORIES	
User Manual	1
Driver Bank	1
RJ45 to DB9 Converter Cable	2
KITS LIST	
VESA Mounting	100 X 100 mm VESA mounting
MSR	Idtech ISO 3-Tracks Slim MSR (USB interface)



RF194SPPC
Panel PC

Fingerprint	Digital Persona Finger Print (USB interface)
Stand	Leverage Breeze Stand
Cable Cover	1

OPTION ITEMS

Touch	True Flat P-CAP
2,0M Pixels Camera	1x(USB interface/only P-cap use)