



RE181QTAB

Rugged tablet



Android



IP65



GPS



High-capacity



Bluetooth



1D



2D



NFC




4G
3G/4G



WiFi

★ FEATURES

- Support for Android 9.0 system
- Integrated 4G all network communication, WiFi, Bluetooth and other communication modes
- 6000mAh battery, 6-8 hours of machine endurance
- IP65 high protection level, in accordance with MIL-STD-810G
- Support GPS, GLONASS, Beidou, more accurate positioning
- Support 13 million pixel auto focus camera, easy to collect images and video information
- Support 1D / 2D, NFC and other functional modules for free selection

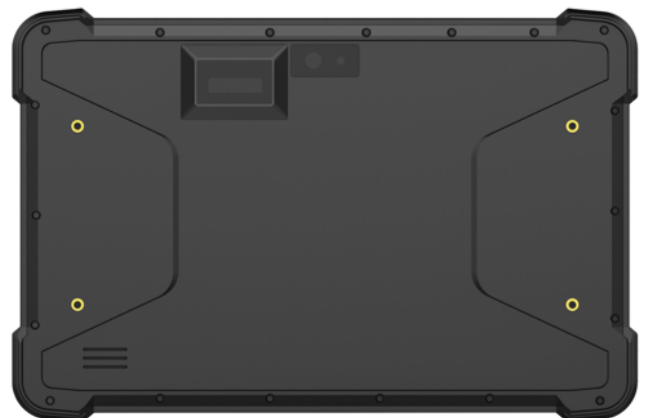



RE181QTAB

Rugged tablet



SPECIFICATION

Basic parameters

Dimension	227.5 x 150 x 21mm
Weight	device unit 590g
Device Color	black
LCD	8inch IPS 16:10, 800*1280
Touch Panel	5points Capacitive, G+G, Corning Gorilla Glass
Camera	Front 5.0MP Rear 13.0MP
I/O	USB 2.0 x 1, USB 3.0 x 1 SIM Card x 1, TF Card x 1 HDMI 1.4a x 1 12pins Pogo Pin x 1 Φ3.5mm standard earphone jack x 1 Φ3.5mm DC jack x 1
Power	AC100V ~ 240V, 50Hz/60Hz output DC 5V/2A
GPS	support GPS, Glonass, BeiDou

Optional modules

NFC	Support ISO/IEC 14443A protocol Card reading distance : 3-5cm
1D	MOTO SE655E100R, Optical Position: 5mil, Scan speed: 50/s
2D	Honeywell N3680, Optical Position: 5mil, Scan speed: 50/s

Performance parameter

CPU	MSM 8953
OS	Android 9.0
RAM	4GB LPDDR3
ROM	64GB

Battery

Capacity	3.7V/6000mAh
Type	Built-in Li-polymer battery
Endurance	5.5hrs

Network connections

WIFI	2.4G+5G dual band WIFI, IEEE 802.11(a/b/g/n/ac)
Bluetooth	BT4.2 (BR/EDR+BLE)
3G/4G	LTE FDD: B1/B3/B5/B7/B8/B20 LTE TDD: B38/B40/B41 WCDMA: B1/B2/B5/B8 GSM: 850/900/1800/1900MHz

Reliability

Operate Temperature	-10 °C ~ 50 °C
Store Temperature	-20 °C ~ 60 °C
Humidity	95% Non-Condensing
IP Grade	IP65

OPTIONAL ACCESSORIES



TP



Docking Charger



Bandage



Vehicle Mount