



# RM31215ADSW

21.5 inch Wall Mounted Digital Signage



## ★ FEATURES


- LG IPS 1080P HD high brightness screen
- Ultra thin border for easy multi-screen splicing
- Network remote management



# RM31215ADSW

21.5 inch Wall Mounted Digital Signage

- LG original IPS 1080P HD high brightness screen.
- Support standard VESA, horizontal or vertical installation.
- Ultra thin border better display and easy multi-screen splicing.
- Network remote management, can transfer contents through computer, mobile phone or USB interface.
- Support timing switch, network wake-up, screen dividing or multi-screen splicing.
- Support Ethernet and WIFI.

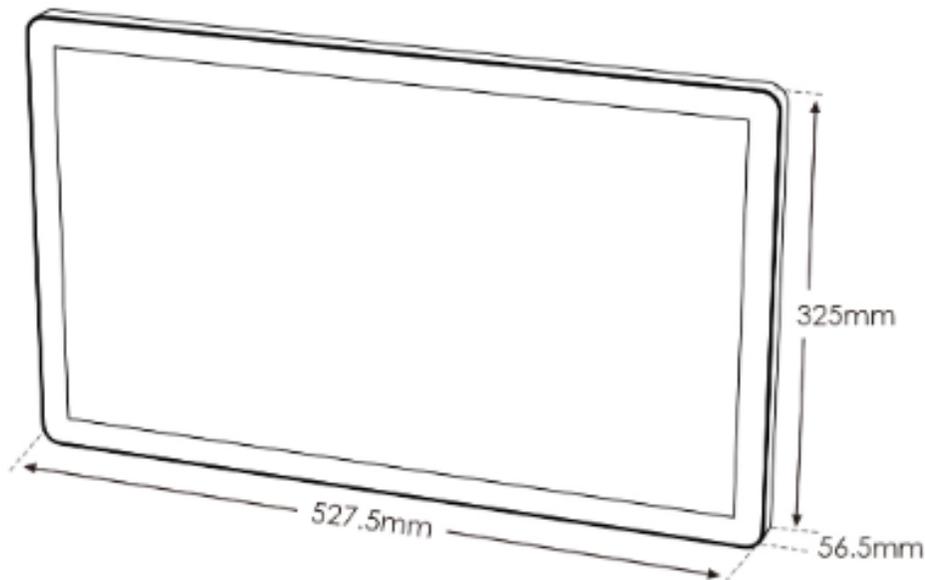



# RM31215ADSW

## 21.5 inch Wall Mounted Digital Signage

### SPECIFICATION

<b>WIN7/10 (trial version)</b>		<b>CPU</b>	Intel Celeron J1900 quad-core 2.0G	
		<b>System Memory</b>	4G	
		<b>Disk</b>	64G/128G/256G(SSD)	
		<b>Speaker</b>	5W*2	
		<b>Interface</b>	USB*3/RJ45*1	
		<b>Network</b>	Ethernet/WIFI	
<b>Android 6.0 and higher version</b>		<b>CPU</b>	A83T Cortex-A7 octa-core 2.0GHz	
		<b>System Memory</b>	1G/2G	
		<b>Disk</b>	8G/16G/32G/64G	
		<b>Speaker</b>	5W*2	
		<b>Interface</b>	USB*2/RJ45*1	
		<b>Network</b>	Ethernet/WIFI	
<b>LCD</b>	<b>Type</b>	TFT-LCD	<b>Contrast Ratio</b>	3000:1
	<b>Screen size</b>	21.5"	<b>Response Time</b>	18ms
	<b>Max Resolution</b>	1920×1080	<b>Viewing Angle</b>	H178° V178°
	<b>Aspect Ratio</b>	16:09	<b>Display Colors</b>	16.7M
	<b>Brightness</b>	300cd/m <sup>2</sup>	<b>Refresh Rate</b>	60Hz
	<b>Panel Life</b>	30000 hours		
<b>Power</b>	<b>Voltage</b>	100-240VAC,50/60Hz	<b>Power Consumption</b>	<50W
<b>Enclosure</b>	<b>Material</b>	SPCC		
	<b>Surface</b>	Powder coating		
	<b>Overall Size</b>	L527.5×W56.5×H325		
	<b>Package</b>	L650×W190×H450		
	<b>Net Weight</b>	7.5kg		
	<b>Gross Weight</b>	10.5kg		
<b>Application</b>	<b>Working temperature</b>	0~40°C	<b>Storage temperature</b>	-20~60°C
	<b>Working humidity</b>	20%~80%	<b>Storage humidity</b>	10%~90%
	<b>Application</b>	indoor		