



# RM3143ADS

## 43" Digital Signage



### ★ FEATURES

Large screen display, high-definition image quality to bring an unparalleled visual enjoyment

Support more than 30 multimedia formats

Powerful editing features, interactive operation

Network centralized management, supporting real-time updating


Support independent software & hardware expansion

Optional wheels for easy movement



# RM3143ADS

## 43" Digital Signage

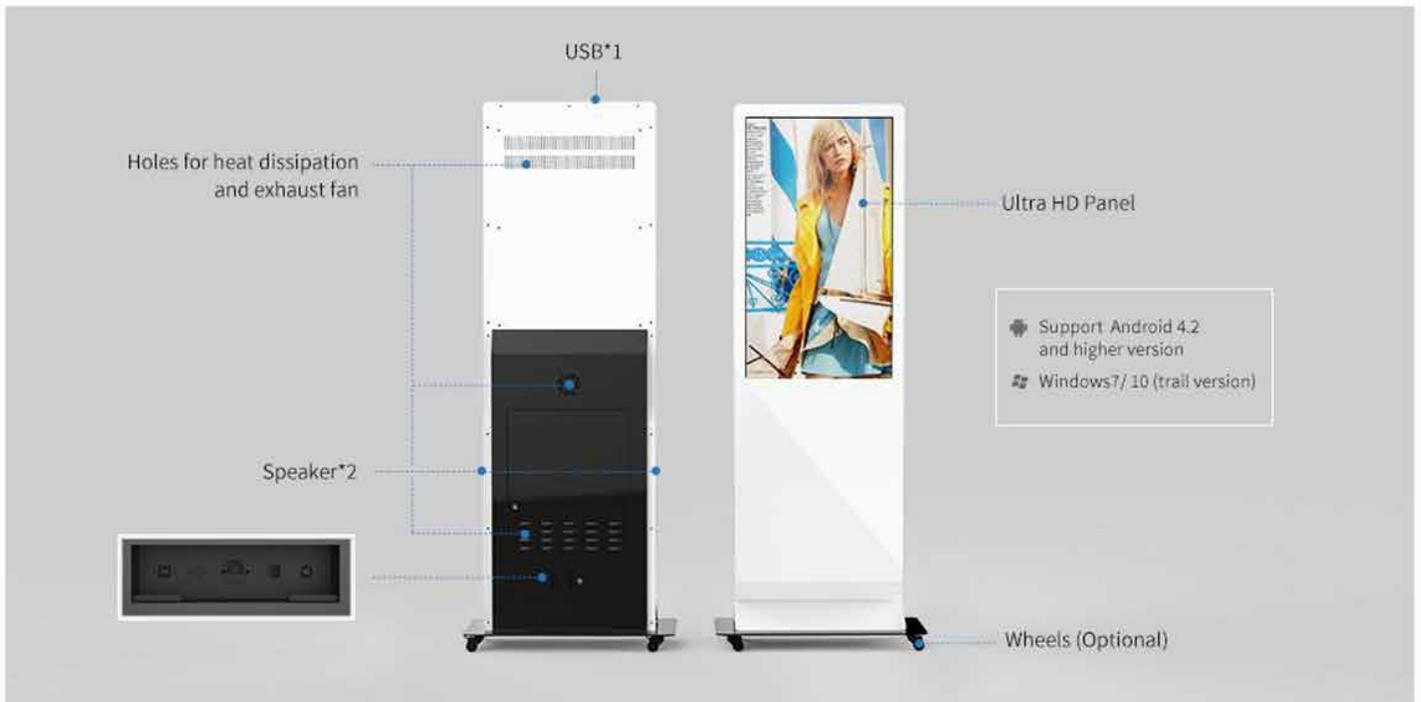

- The multi-point infrared touch technology support powerful interactive features and applications are wider.



- Designed with two - channel speakers



- Holes for heat dissipation



- For additional ports can be customized



# RM3143ADS

## 43" Digital Signage



### SPECIFICATION

<b>WIN7/10 (trial version)</b>		<b>CPU</b>	Intel Celeron J1900 quad-core 2.0G	
		<b>System Memory</b>	4G	
		<b>Disk</b>	64G/128G/256G(SSD)	
		<b>Speaker</b>	5W*2	
		<b>Interface</b>	USB*3/RJ45*1	
		<b>Network</b>	Etherneter/WIFI	
<b>Android 5.1 and higher version</b>		<b>CPU</b>	RK3288 Cortex-A17 quad-core 1.8GHz	
		<b>System Memory</b>	2G/4G	
		<b>Disk</b>	8G/16G/32G/64G	
		<b>Speaker</b>	5W*2	
		<b>Interface</b>	USB*2/RJ45*1	
		<b>Network</b>	Etherneter/WIFI	
<b>Screen</b>	<b>Type</b>	Projective Capacitive Touch(10 points)	<b>Response Time</b>	10ms
<b>LCD</b>	<b>Type</b>	TFT-LCD	<b>Contrast Ratio</b>	1100:1
	<b>Screen size</b>	43"	<b>Response Time</b>	12ms
	<b>Max Resolution</b>	1920×1080	<b>Viewing Angle</b>	H178° V178°
	<b>Aspect Ratio</b>	16:09	<b>Display Colors</b>	16.7M
	<b>Brightness</b>	400cd/m <sup>2</sup>	<b>Refresh Rate</b>	60Hz
	<b>Panel Life</b>	50000 hours		
<b>Power</b>	<b>Voltage</b>	100-240VAC,50/60Hz	<b>Power Consumption</b>	<75W(43"), <100W(55")
<b>Enclosure</b>	<b>Material</b>	SPCC		
	<b>Surface</b>	Powder coating		
	<b>Overall Size</b>	43",L760×W400×H1909/L760×W400×H1969(with wheels)		
	<b>Package</b>	43", L2065×W840×H580		
	<b>Net Weight</b>	73kg(43")		
	<b>Gross Weight</b>	151kg(43")		
<b>Application</b>	<b>Working temperature</b>	0~40°C	<b>Storage temperature</b>	-20~60°C
	<b>Working humidity</b>	20%~80%	<b>Storage humidity</b>	10%~90%
	<b>Application</b>	indoor		
<b>Built-in Devices</b>	<b>Printer</b>	58mm thermal printer with auto cutter		
	<b>Scanner</b>	2D,Area-Imaging Scanner		